



LC200 CaptureVision System




Lumens CaptureVision System LC200 is an innovative media processor that allows you to record and create live streaming by mixing, encoding, and switching up to 4 HDMI or 3 IP video sources, and 4 audio sources. The LC200 can backup video files to a content management server or stream to most cloud video servers. It is applicable for use in education, corporate, government, healthcare, house of worship, and other applications.

Key Features

- Supports 1080p 60/30fps recording
- Supports 4 HDMI Inputs and IP video sources including Lumens IP cameras, and standard RTSP streams.
- Supports HDMI-embedded audio or analog stereo audio with 4 channels Audio Input mixing and gain control.
- Flexible scaling and window processing, supports PIP, PBP and up to 4 windows layout and mixing
- Advanced Scenes Switch
- Webpage and plug and play GUI Director Interface
- Built-in 1TB HDD storage or optional 2TB HDD

Product Interface

■ Front Side View

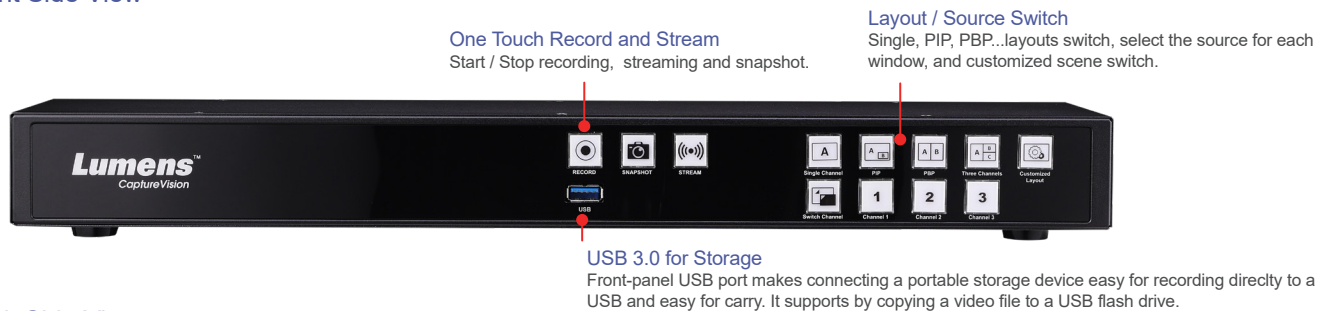


■ Back Side View

Analog stereo audio Input

Supports 4 analog stereo audio (3.5 mm phone jack) For line in.

Line Out

3.5mm phone jack line out for live audio mix monitoring.

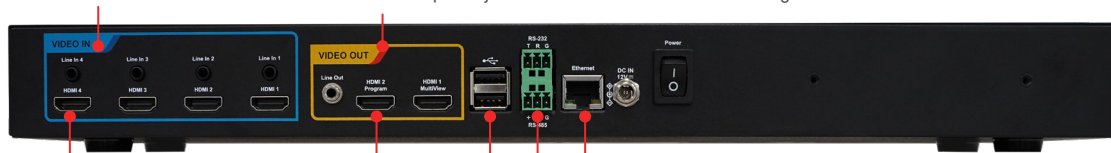

HDMI Input

Supports 4 full HD HDM video inputs and HDMI-embedded audio.

HDMI Output x2

One Program(mixed video) and one Multi-view(GUI) interface output to display.

USB 2.0

Supports USB Mouse and Keyboard for the GUI interface operations.

RS-232 / RS-485 serial port

Supports USB Mouse and Keyboard for the GUI interface operations.

Ethernet

Ethernet port allows to receive video streaming from the IP source, stream transport and transfer storage directories. It also supports embedded web interface and AV control systems.


Product Specifications

VIDEO INPUT	
Number / Signal	4 HDMI digital video
Connection	4 female HDMI type-A
Resolution Range	480i~1080p 60fps
IP Source	Lumens IP PTZ / Box Cameras RTSP Source (H.264 1080p 60/30fps)
VIDEO PROCESSING	
Video Compression	H.264/AVC 4:2:0 8bit color Encoding profile: High, Main, Baseline
Bitrate	200 kbps to 10 Mbps
VIDEO OUTPUT	
Number / Signal	3 H.264/AVC digital video over Ethernet 2 HDMI digital video
Scaled Resolution	1080p
Frame Rate	30 / 60 fps
RECORDING AND STORAGE	
Internal Storage	Standard 1TB HDD / Optional 2TB HDD
External Storage	1 USB 3.0 port in front panel
File Type	H.264 and AAC in an MP4 container, JPEG
Resolution	360p, 720p, 1080p
Frame Rate	Max. 1080p 60/30 fps
AUDIO INPUT	
Number / Signal	4 Line In (stereo, 3.5mm phone jack) 4 stereo, digital de-embedded audio from HDMI IP Audio Source (RTSP, AAC-Raw, 16K / 44.1K / 48K)
AUDIO PROCESSING	
Compression	AAC-LC

AUDIO OUTPUT	
Number / Signal	1 stereo, unbalanced 3.5mm phone jack 2 stereo, digital de-embedded audio from HDMI
COMMUNICATION	
USB	2 rear panel USB 2.0 type A Support USB mouse, keyboard, HID touch display
Serial Control	RS-232 / RS-485 port
ETHERNET	
Ethernet Host Port	1 female RJ-45 10/100/1000 Base-T high/full duplex
Streaming Protocol	Pull: RTSP Push: RTMP / RTMPS / MPEG-TS TCP, UDP, HTTP DHCP Client
FUNCTIONS	
Supports IP Sources	Lumens IP Cameras, RTSP
Scenes Switch	Yes, preset for layout, background, and overlay
Layout Switch	Yes (Single, PIP, PBP, 3 and 4 windows layouts)
Background Switch	Yes
Overlay	Yes, PNG overlay or System time overlay
File Backup	FTP / SFTP / NAS(CIFS/SMB, NFS) / USB Flash Drive
GENERAL	
Power Supply	DC In , 12 V / 2A
Power Consumption	24W
Dimensions	Standard 1u rack dimensions 122.5mm(L) x 431mm (W) x 44.3mm (H)
Weight	1.2 kg

Optional Accessory

Lumens LC-RC01 remote control panel, a wall plate for the LC200 to control the live streaming, recording, and video file saving options. The panel provides three macro functions that can remotely switch the scene and control the cameras preset. The LC-RC01 can be extended to 30 meters through a Cat 5e cable. It can be mounted on walls and furniture in any standard one-gang US/EU A/V frame enclosure. Equipped with a USB port, it supports USB flash drives to record or backup video files. The LC-RC01 offers greater flexibility for operating the LC200.

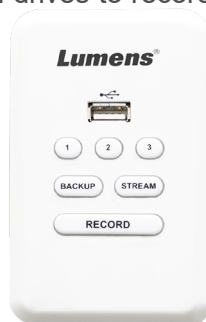

U.S. standard: LC-RC01U



Europe standard: LC-RC01E

Lumens®

Lumens Integration, Inc.
4116 Clipper Court
Fremont, CA, 94538
Phone: +1-866-600-0988
Fax: +1-510-252-1389

Lumens Europe
De Nayerstraat 17 9470
Denderleeuw Belgium
Phone : +32-473-58-38-95
Fax : +32-2-452-76-00



www.MyLumens.com