

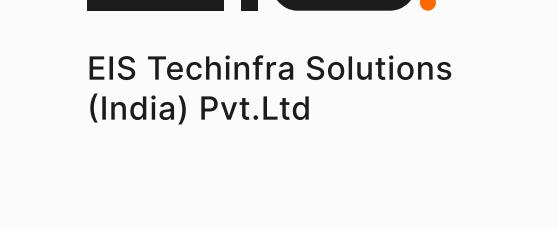
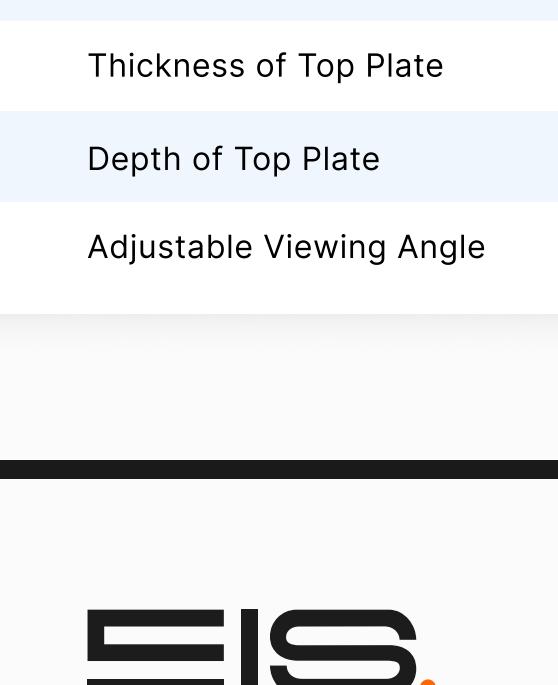
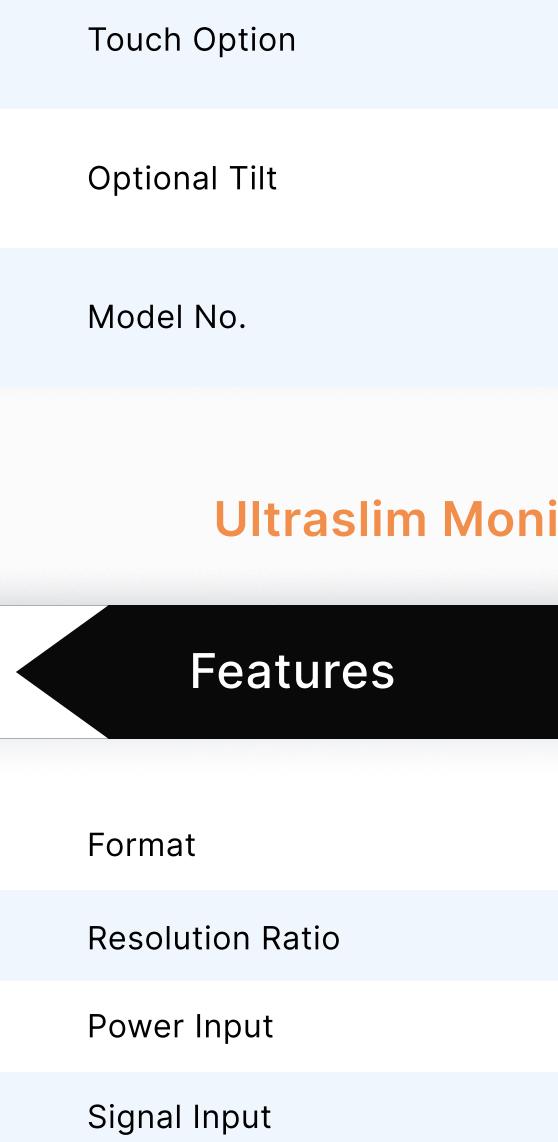


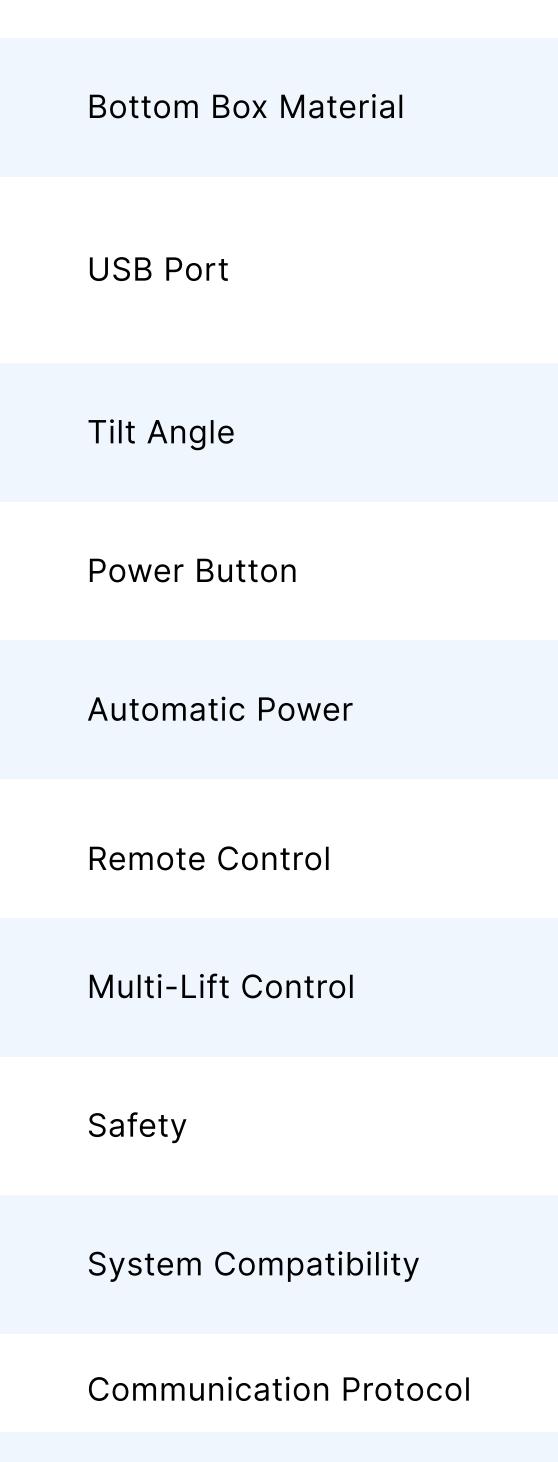

Ultraslim Monitor Lift

- Built-in with high quality LED touch screen.
- Optimized for the most versatile use and viewing experience.
- Easy to install and easy to use with separate USB connector and compatible with most of the control systems.

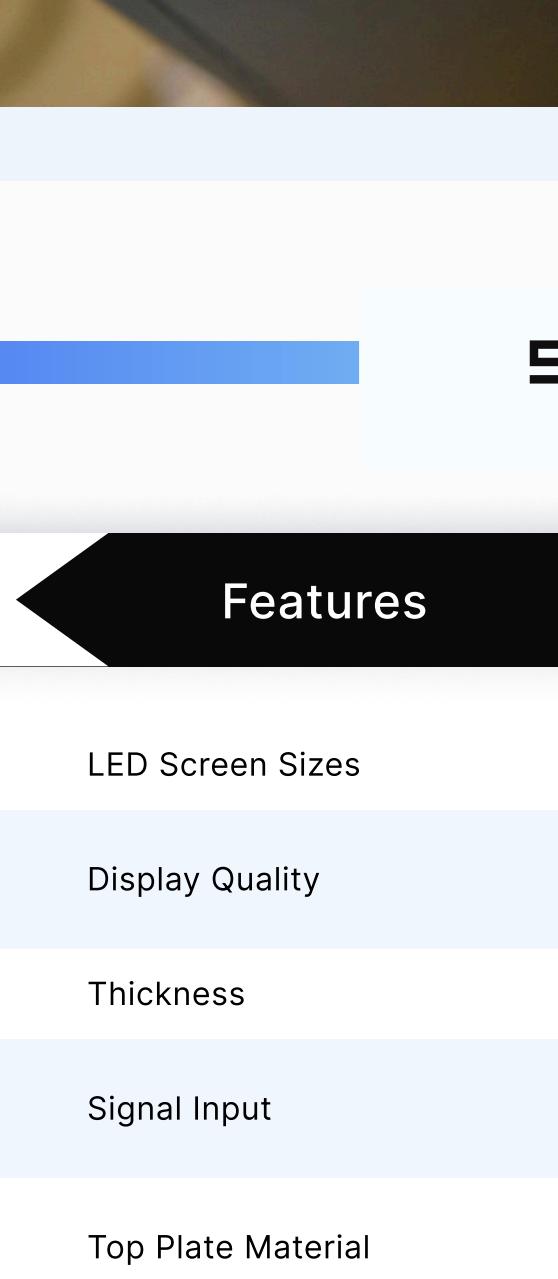

EIS.touch

Description

Features

LED Screen Sizes	15.6 / 17.3 / 18.4 / 21.5 / 23.6 inches
Display Quality	Each lift comes with a high-quality LED screen
Thickness	Ultra-thin design – only 78mm
Signal Input	2 input methods, switchable with 1 button
Top Plate Material	Brushed aluminum available in silver and black
Bottom Box Material	Aluminum for a lighter, more premium mechanism
USB Port	Separate USB port with soft plastic cover for external device connection or phone charging
Tilt Angle	15° backward tilt for comfortable viewing
Power Button	Dedicated power button on top plate for easy ON/OFF
Automatic Power	Monitor turns on/off automatically
Remote Control	RF wireless remote plus manual control board on top plate
Multi-Lift Control	One remote can control all lifts within 30 meters
Safety	Designed to prevent hand clamping for user safety
System Compatibility	Works with integrated systems like AMX, Crestron, Crestron, etc.
Communication Protocol	RS485/232
Touch Option	Capacitive touch screen versions available
Optional Tilt	Maximum backward tilt available up to 60°
Model No.	ET - SLIM ML - X / XT

Ultraslim Monitor Technical Specifications

Features

Specifications

Format	16:9
Resolution Ratio	1920 x 1080
Power Input	220 ~ 240 V / 50 Hz
Signal Input	HDMI / VGA
Thickness of Top Plate	1.8 mm
Depth of Top Plate	78 mm
Adjustable Viewing Angle	15 degree

Specifications are subject to change without notice.

EIS Techinfra Solutions
(India) Pvt. Ltd

#311, 306, First Floor, 100ft Road, 10th Main Road, Sahakara Nagar, Bengaluru - 560092

Phone: 080-43773134 | Email: sales@einfratech.com | Website: www.einfratech.com

EIS Techinfra Solutions
(India) Pvt. Ltd